


GB Dimensions [mm]

D Abmessungen [mm]

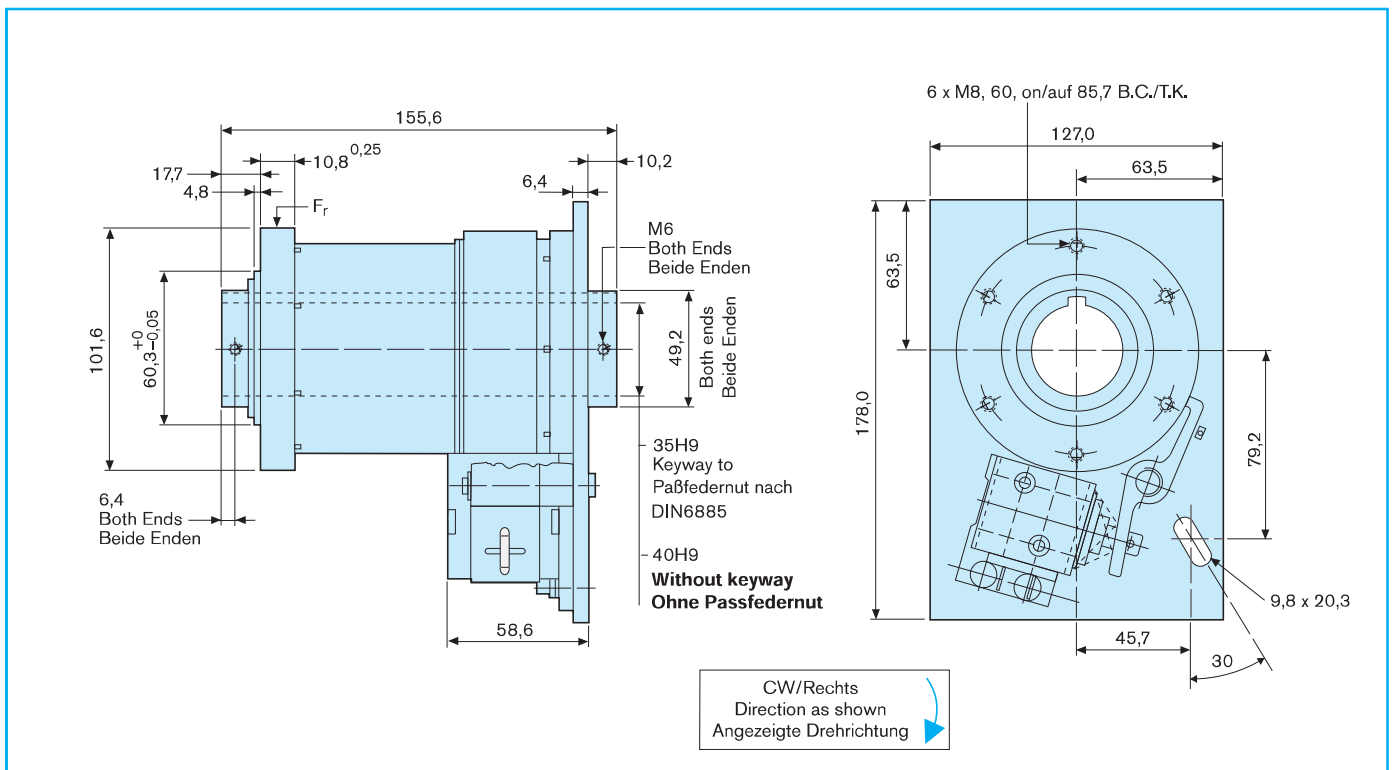

Specifications

Rated torque	(M _d)	280 Nm
Max. anti-overrun torque	(M _{aor})	68 Nm
Max. anti-back torque	(M _{atb})	68 Nm
Drag torque, clutch	(M _r)	1 Nm
Max. speed	(n)	300 RPM
Clutch inertia	(J _c)	38,0 kgcm ²
Max. radial load	(F _r)	1335 N
Time to speed	(TTS) *	50 ms
Acceleration	(t _a)	3 ms
Deceleration	(t _d)	1,5 ms
Overtravel setting at 28 - 54 Nm	(OT)	9,6 - 12,7 mm
Weight	(m)	6,85 kg
*with Standard Components		
Voltage	24 VDC	12 VDC
Current	0,586 A	1,15 A
Resistance	41,0 Ω	10,4 Ω
	115 VAC, 230 VAC on request	

Spezifikationen

Nenn Drehmoment	(M _d)	280 Nm
Max. Drehmoment (Vorlaufsperr)	(M _{aor})	68 Nm
Max. Drehmoment (Rücklaufsperr)	(M _{atb})	68 Nm
Schleppmoment (Kupplung)	(M _r)	1 Nm
Max. Drehzahl	(n)	300 min ⁻¹
Massenträgheitsmoment (Kupplung)	(J _c)	38,0 kgcm ²
Max. Radialbelastung	(F _r)	1335 N
Anlaufzeit	(TTS) *	50 ms
Beschleunigungszeit	(t _a)	3 ms
Verzögerungszeit	(t _d)	1,5 ms
Überlauf bei 28 - 54 Nm	(OT)	9,6 - 12,7 mm
Masse	(m)	6,85 kg
*Mit Standardkomponenten		
Spannung	24 VDC	12 VDC
Strom	0,586 A	1,15 A
Widerstand	41,0 Ω	10,4 Ω
	115 VAC, 230 VAC auf Anfrage	

Standard Part Numbers

318-17-001	CB8-CW-24DC-35H9
318-17-002	CB8-CW-24DC-40H9
318-27-001	CB8-CCW-24DC-35H9
318-27-002	CB8-CCW-24DC-40H9
318-17-003	CB8-CW-24DC-35H9-2 Stop
318-17-004	CB8-CW-24DC-40H9-2 Stop
318-27-003	CB8-CCW-24DC-35H9-2 Stop
318-27-004	CB8-CCW-24DC-40H9-2 Stop
318-17-005	CB8-CW-24DC-35H9-4 Stop
318-17-006	CB8-CW-24DC-40H9-4 Stop
318-27-005	CB8-CCW-24DC-35H9-4 Stop
318-27-006	CB8-CCW-24DC-40H9-4 Stop

Inch models on request

Teilenummern für Standard-Ausführungen

318-17-007	CB8-CW-12DC-35H9
318-17-008	CB8-CW-12DC-40H9
318-27-007	CB8-CCW-12DC-35H9
318-27-008	CB8-CCW-12DC-40H9
318-17-009	CB8-CW-12DC-35H9-2 Stop
318-17-010	CB8-CW-12DC-40H9-2 Stop
318-27-009	CB8-CCW-12DC-35H9-2 Stop
318-27-010	CB8-CCW-12DC-40H9-2 Stop
318-17-011	CB8-CW-12DC-35H9-4 Stop
318-17-012	CB8-CW-12DC-40H9-4 Stop
318-27-011	CB8-CCW-12DC-35H9-4 Stop
318-27-012	CB8-CCW-12DC-40H9-4 Stop

Zolleinheiten auf Anfrage