


GB Dimensions [mm]

D Abmessungen [mm]

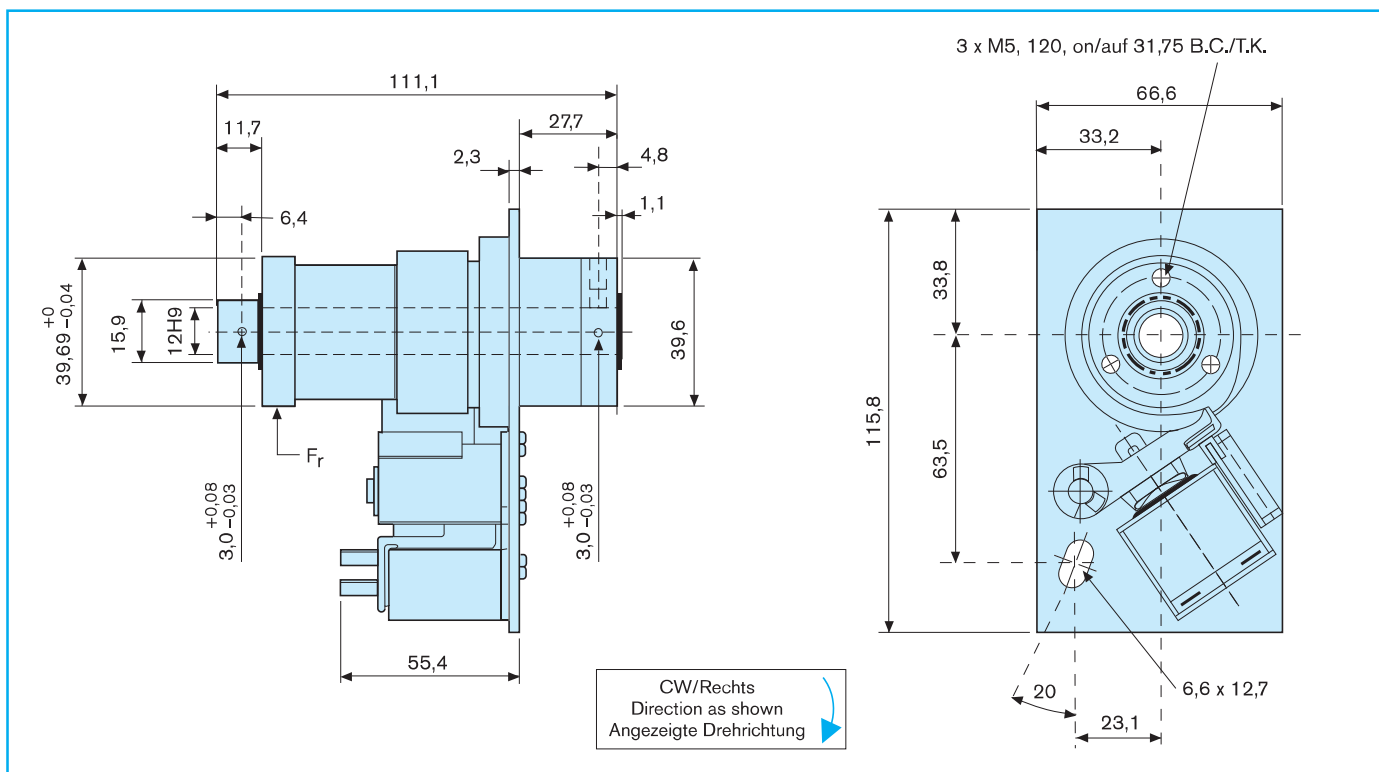

Specifications

Spezifikationen

Rated torque	(M _d)	28 Nm	Nennndrehmoment	(M _d)	28 Nm
Max. anti-overnrun torque	(M _{aor})	5 Nm	Max. Drehmoment (Vorlaufsperr)	(M _{aor})	5 Nm
Max. anti-back torque	(M _{atb})	18 Nm	Max. Drehmoment (Rücklaufsperr)	(M _{atb})	18 Nm
Drag torque, clutch	(M _r)	0,11 Nm	Schleppmoment (Kupplung)	(M _r)	0,11 Nm
Max. speed	(n)	750 RPM	Max. Drehzahl	(n)	750 min ⁻¹
Clutch inertia	(J _c)	0,6 kgcm ²	Massenträgheitsmoment (Kupplung)	(J _c)	0,6 kgcm ²
Max. radial load	(F _r)	142 N	Max. Radialbelastung	(F _r)	142 N
Time to speed	(TTS) *	27 ms	Anlaufzeit	(TTS) *	27 ms
Acceleration	(t _a)	3 ms	Beschleunigungszeit	(t _a)	3 ms
Deceleration	(t _d)	1,5 ms	Verzögerungszeit	(t _d)	1,5 ms
Overtravel setting at 4,5 - 6,8 Nm	(OT)	3,8 - 6,3 mm	Überlauf bei 4,5 - 6,8 Nm	(OT)	3,8 - 6,3 mm
Weight	(m)	1,4 kg	Masse	(m)	1,4 kg
*with Standard Components			*Mit Standardkomponenten		
Voltage	24 VDC	12 VDC	Spannung	24 VDC	12 VDC
Current	0,325 A	0,732 A	Strom	0,325 A	0,732 A
Resistance	74 Ω	16,4 Ω	Widerstand	74 Ω	16,4 Ω
115 VAC, 230 VAC on request			115 VAC, 230 VAC auf Anfrage		

Standard Part Numbers

335-17-001	Super CB5-CW-24DC-12H9
335-27-001	Super CB5-CCW-24DC-12H9
335-17-002	Super CB5-CW-24DC-12H9-2 Stop
335-27-002	Super CB5-CCW-24DC-12H9-2 Stop
335-17-003	Super CB5-CW-24DC-12H9-4 Stop
335-27-003	Super CB5-CCW-24DC-12H9-4 Stop

Teilenummern für Standard-Ausführungen

335-17-010	Super CB5-CW-12DC-12H9
335-27-010	Super CB5-CCW-12DC-12H9
335-17-011	Super CB5-CW-12DC-12H9-2 Stop
335-27-011	Super CB5-CCW-12DC-12H9-2 Stop
335-17-012	Super CB5-CW-12DC-12H9-4 Stop
335-27-012	Super CB5-CCW-12DC-12H9-4 Stop