


GB Dimensions [mm]

D Abmessungen [mm]

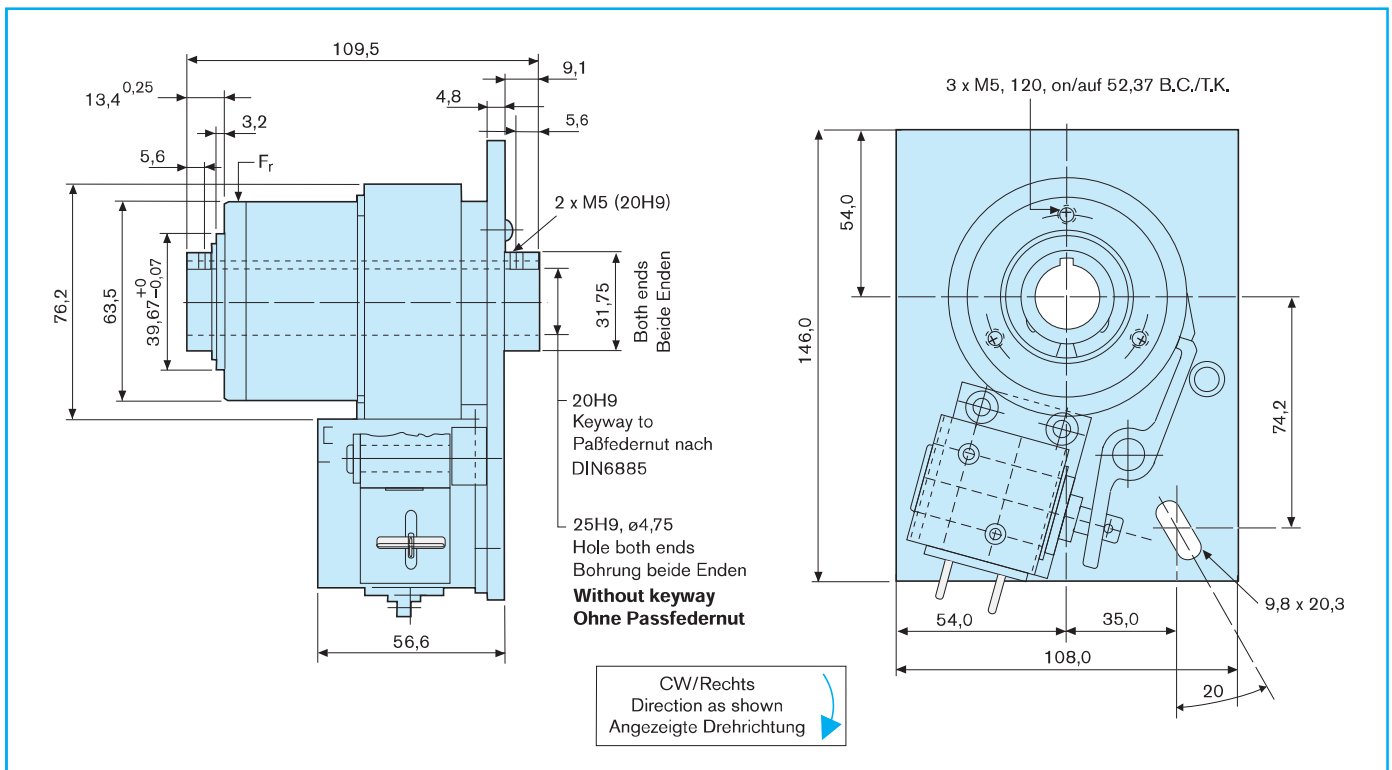

Specifications

Rated torque	(M _d)	56 Nm
Max. anti-overrun torque	(M _{aor})	34 Nm
Max. anti-back torque	(M _{atb})	34 Nm
Drag torque, clutch	(M _r)	0,3 Nm
Max. speed	(n)	500 RPM
Clutch inertia	(J _c)	5,1 kgcm ²
Max. radial load	(F _r)	280 N
Time to speed	(TTS) *	45 ms
Acceleration	(t _a)	3 ms
Deceleration	(t _d)	1,5 ms
Overtravel setting at 8,2 - 16 Nm	(OT)	4,8 - 9,6 mm
Weight	(m)	3,2 kg
*with Standard Components		
Voltage	24 VDC	12 VDC
Current	0,586 A	1,15 A
Resistance	41,0 Ω	10,4 Ω
115 VAC, 230 VAC on request		

Spezifikationen

Nenn Drehmoment	(M _d)	56 Nm
Max. Drehmoment (Vorlauf Sperre)	(M _{aor})	34 Nm
Max. Drehmoment (Rücklauf Sperre)	(M _{atb})	34 Nm
Schleppmoment (Kupplung)	(M _r)	0,3 Nm
Max. Drehzahl	(n)	500 min ⁻¹
Massenträgheitsmoment (Kupplung)	(J _c)	5,1 kgcm ²
Max. Radialbelastung	(F _r)	280 N
Anlaufzeit	(TTS) *	45 ms
Beschleunigungszeit	(t _a)	3 ms
Verzögerungszeit	(t _d)	1,5 ms
Überlauf bei 8,2 - 16 Nm	(OT)	4,8 - 9,6 mm
Masse	(m)	3,2 kg
*Mit Standardkomponenten		
Spannung	24 VDC	12 VDC
Strom	0,586 A	1,15 A
Widerstand	41,0 Ω	10,4 Ω
115 VAC, 230 VAC auf Anfrage		

Standard Part Numbers

316-17-001	CB6-CW-24DC-20H9
316-17-002	CB6-CW-24DC-25H9
316-27-001	CB6-CCW-24DC-20H9
316-27-002	CB6-CCW-24DC-25H9
316-17-003	CB6-CW-24DC-20H9-2 Stop
316-17-004	CB6-CW-24DC-25H9-2 Stop
316-27-003	CB6-CCW-24DC-20H9-2 Stop
316-27-004	CB6-CCW-24DC-25H9-2 Stop
316-17-005	CB6-CW-24DC-20H9-4 Stop
316-17-006	CB6-CW-24DC-25H9-4 Stop
316-27-005	CB6-CCW-24DC-20H9-4 Stop
316-27-006	CB6-CCW-24DC-25H9-4 Stop

Inch models on request

Teilenummern für Standard-Ausführungen

316-17-007	CB6-CW-12DC-20H9
316-17-008	CB6-CW-12DC-25H9
316-27-007	CB6-CCW-12DC-20H9
316-27-008	CB6-CCW-12DC-25H9
316-17-009	CB6-CW-12DC-20H9-2 Stop
316-17-010	CB6-CW-12DC-25H9-2 Stop
316-27-009	CB6-CCW-12DC-20H9-2 Stop
316-27-010	CB6-CCW-12DC-25H9-2 Stop
316-17-011	CB6-CW-12DC-20H9-4 Stop
316-17-012	CB6-CW-12DC-25H9-4 Stop
316-27-011	CB6-CCW-12DC-20H9-4 Stop
316-27-012	CB6-CCW-12DC-25H9-4 Stop

Zolleinheiten auf Anfrage