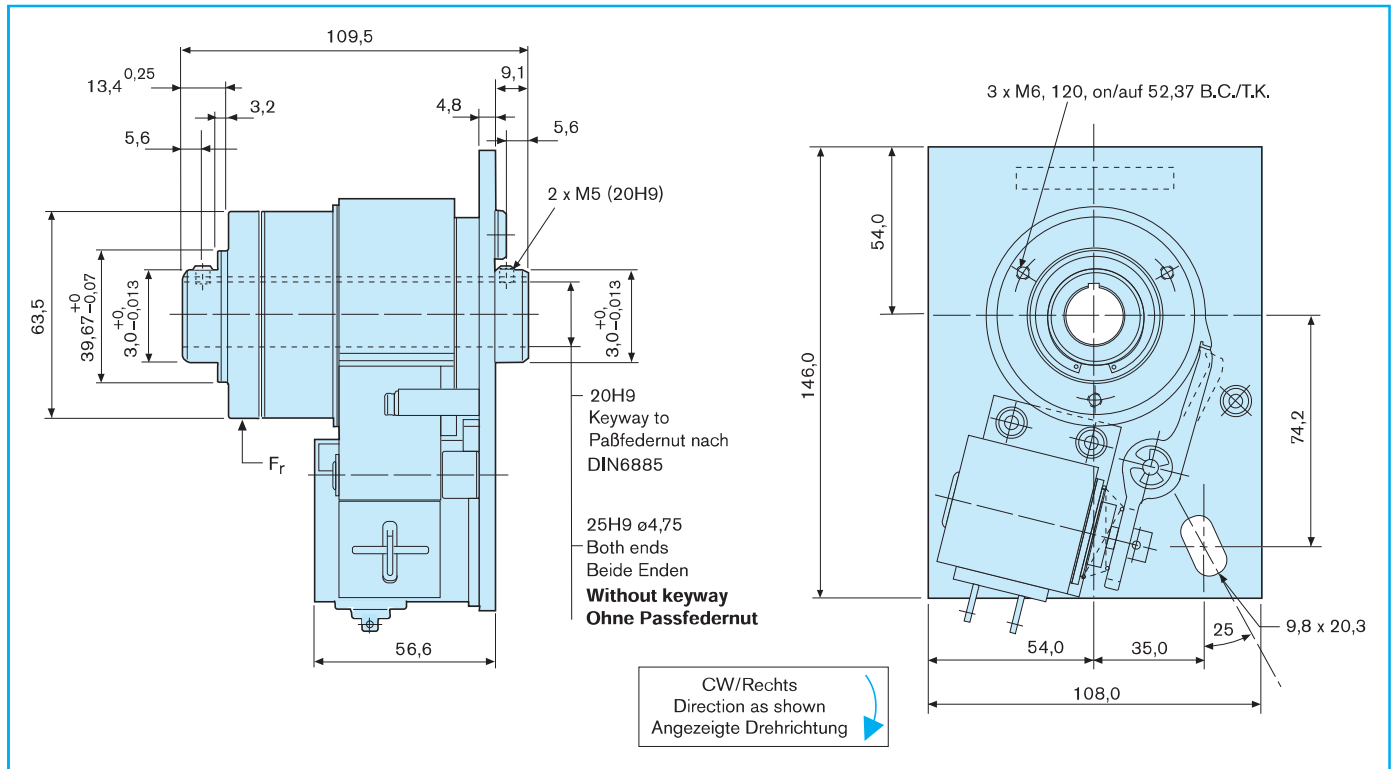


GB Dimensions [mm]
D Abmessungen [mm]

Specifications
Spezifikationen

Rated torque	(M_d)	56 Nm	Neendrehmoment	(M_d)	56 Nm
Max. anti-overrun torque	(M_{aor})	34 Nm	Max. Drehmoment (Vorlaufsperr)	(M_{aor})	34 Nm
Max. anti-back torque	(M_{atb})	34 Nm	Max. Drehmoment (Rücklaufsperr)	(M_{atb})	34 Nm
Drag torque, clutch	(M_r)	0,3 Nm	Schleppmoment (Kupplung)	(M_r)	0,3 Nm
Max. speed	(n)	500 RPM	Max. Drehzahl	(n)	500 min ⁻¹
Clutch inertia	(J_c)	5,1 kgcm ²	Massenträgheitsmoment (Kupplung)	(J_c)	5,1 kgcm ²
Max. radial load	(F_r)	280 N	Max. Radialbelastung	(F_r)	280 N
Time to speed	(TTS) *	45 ms	Anlaufzeit	(TTS) *	45 ms
Acceleration	(t_a)	3 ms	Beschleunigungszeit	(t_a)	3 ms
Deceleration	(t_d)	1,5 ms	Verzögerungszeit	(t_d)	1,5 ms
Overtravel setting at 8,2 - 16 Nm	(OT)	4,8 - 9,6 mm	Überlauf bei 8,2 - 16 Nm	(OT)	4,8 - 9,6 mm
Weight	(m)	3,2 kg	Masse	(m)	3,2 kg
*with Standard Components			*Mit Standardkomponenten		
Voltage		24 VDC 12 VDC	Spannung		24 VDC 12 VDC
Current		0,586 A 1,15 A	Strom		0,586 A 1,15 A
Resistance		41,0 Ω 10,4 Ω	Widerstand		41,0 Ω 10,4 Ω
		115 VAC, 230 VAC on request			115 VAC, 230 VAC auf Anfrage

Standard Part Numbers

336-17-013	Super CB6-CW-24DC-20H9
336-17-016	Super CB6-CW-24DC-25H9
336-27-013	Super CB6-CCW-24DC-20H9
336-27-016	Super CB6-CCW-24DC-25H9
336-17-014	Super CB6-CW-24DC-20H9-2 Stop
336-17-017	Super CB6-CW-24DC-25H9-2 Stop
336-27-014	Super CB6-CCW-24DC-20H9-2 Stop
336-27-017	Super CB6-CCW-24DC-25H9-2 Stop
336-17-015	Super CB6-CW-24DC-20H9-4 Stop
336-17-018	Super CB6-CW-24DC-25H9-4 Stop
336-27-015	Super CB6-CCW-24DC-20H9-4 Stop
336-27-018	Super CB6-CCW-24DC-25H9-4 Stop

Inch models on request

Teilenummern für Standard-Ausführungen

336-17-007	Super CB6-CW-12DC-20H9
336-17-010	Super CB6-CW-12DC-25H9
336-27-007	Super CB6-CCW-12DC-20H9
336-27-010	Super CB6-CCW-12DC-25H9
336-17-008	Super CB6-CW-12DC-20H9-2 Stop
336-17-011	Super CB6-CW-12DC-25H9-2 Stop
336-27-008	Super CB6-CCW-12DC-20H9-2 Stop
336-27-011	Super CB6-CCW-12DC-25H9-2 Stop
336-17-009	Super CB6-CW-12DC-20H9-4 Stop
336-17-012	Super CB6-CW-12DC-25H9-4 Stop
336-27-009	Super CB6-CCW-12DC-20H9-4 Stop
336-27-012	Super CB6-CCW-12DC-25H9-4 Stop

Zolleinheiten auf Anfrage